


# B400001

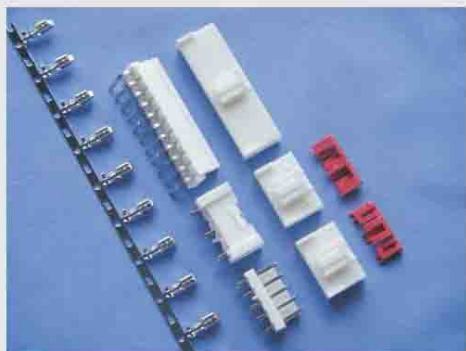

### ▶ 主要技术特性 (Main Specifications)

- ▶ 适用导线规格 (Applicable wire) : AWG22#~18#
- ▶ 适用基板厚度 (Applicable PC board thickness) : 1.6mm
- ▶ 温度范围 (Temperature range) : -25°C~+85°C
- ▶ 额定电压 (Voltage rating) : 250V AC, DC
- ▶ 额定电流 (Current rating) : 10A AC, DC
- ▶ 接触电阻 (Contact resistance) :  $\leq 0.02\Omega$
- ▶ 绝缘电阻 (Insulation resistance) :  $\geq 1000M\Omega$
- ▶ 耐压 (Withstanding voltage) : 1500V AC/minute

### 材料及电镀规格 Material and Finish

型号 Type	材料 Material	材料厚度 Material Thickness	电镀规格 Finish
插座 WAFER	塑胶 HOUSING	PA66 UL94V-0	N/A
	针PIN	黄铜 Brass	镀锡 Tin-plated
孔座 HOUSING	PA66 UL94V-0	—	N/A
端子 TERMINAL	锡青铜 Phosphor bronze	0.25mm	镀锡 Tin-plated





### 产品尺寸图 Product size chart

 单位: mm 一般公差:  $\pm 0.20$ 

### WAFER

B400001-1

### 安装尺寸 (Mounting measurement)



### HOUSING

极数 Circuits	型号 Type	尺寸 (Dimensions) mm		备注型号 P. S. Type
		A	B	
2	B400001-1-02	4.0	7.86	VH-02A 4.0
3	B400001-1-03	8.0	11.82	VH-03A 4.0
4	B400001-1-04	12.0	15.78	VH-04A 4.0
5	B400001-1-05	16.0	19.74	VH-05A 4.0
6	B400001-1-06	20.0	23.70	VH-06A 4.0
7	B400001-1-07	24.0	27.66	VH-07A 4.0
8	B400001-1-08	28.0	31.62	VH-08A 4.0
9	B400001-1-09	32.0	35.58	VH-09A 4.0
10	B400001-1-10	36.0	39.54	VH-10A 4.0
11	B400001-1-11	40.0	43.50	VH-11A 4.0